etikett.de
die labeldruckerei

WE ♥ LABELS

BFO01

Tyvek 150µm

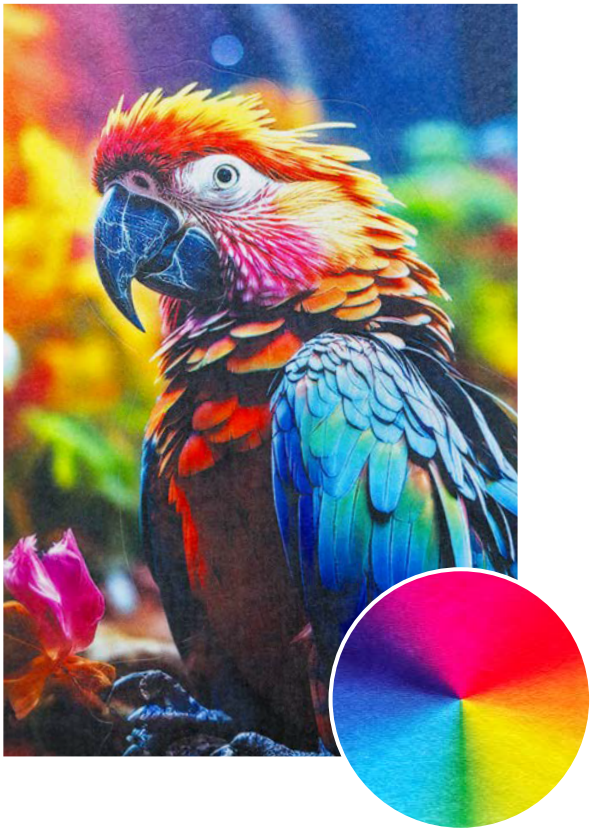

Description
A white, spunbonded polyolefin with very good tear resistance.

Basis Weight	55 g/m
Caliper	150 µm

Liner
BG40 white, a supercalendered glassine paper.

Adhesive
A general purpose permanent, acrylic based adhesive.

Performance Data

Min. Application Temp.:	5°C
Service Temperature:	-20°C to 80°C

Adhesive Performance
S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

Shelf Life
Two years under storage conditions as defined by FINAT (20- 25°C; 40-50%RH).

Applications and Use
Due to the high mechanical and chemical resistance of the face stock the product is suitable for labels on containers and drums in the chemical industry, and for the production of durable tags for industrial and horticultural applications. The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Can be overwritten and stamped
NORIS stamping ink #191 is recommended.
Ink dries in about 30 seconds.

These results are based on tests carried out by our suppliers and our own experience. We cannot give any guarantee for the optimal adhesion of the materials. We assume that the customer checks the suitability of the materials, meets his needs and decides for the right material that meets his requirements. The labels should be stored in a dryplace, at an ambient temperature of between 20° - 24 °C and protected from the effects of the weather, such as sun, rain or snow. The adhesive reacts very quickly, especially to the effects of weathering.

QUESTIONS? WE'RE HERE TO HELP!

+49 6502 98494 0

info@etikett.de

The colour of the material shown may vary. Therefore, we recommend that you order our free online sample book at *etikett.de/musterbuch* to get a better understanding of the effects and different textures.

Order free of charge:

SAMPLE BOOK