etikett.de
die labeldruckerei

WE ♥ LABELS

BFO07

Highly Transparent PP Film 50µm

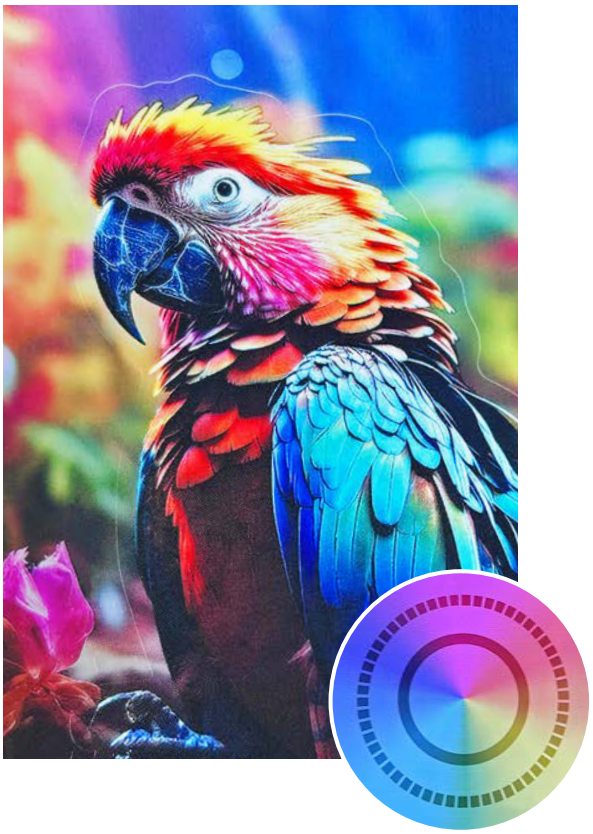

Description
A clear bi-axially oriented, polypropylene film with a printreceptive topcoat.

Basis Weight	43 g/m
Caliper	47 µm

Liner
A clear polyester liner giving optimum smoothness to the adhesive layer. rPET30 liner contains 30% Post-Consumer Recycled (PCR) content. This liner is 100% recyclable. Visit our website for more information.

Adhesive
A clear, general purpose permanent, acrylic adhesive.

Performance Data

Min. Application Temp.:	5°C
Service Temperature:	-20°C to 50°C

Adhesive Performance
S7000 exhibits a balance of release properties to enable high speed converting and dispensing on increasingly thinner substrates. Designed for application on dry surfaces. Excellent wet out characteristics and water-whitening resistance. Significantly less adhesive bleed vs. Industry standard, which reduces downtime on press and dispensing equipment.

Shelf Life
To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Applications and Use
Applications are predominantly in market segments where rigid containers are used (e.g. Glass, PET). Due to fairly rigid nature of the film, care should be taken with use on non-uniform surfaces and where a high level of squeezability is desired. Automatic application: The robust film liner allows for consistent, snap free, application on high speed lines.

Some labelling systems require an additional label to be applied to the product, so please do not hesitate to contact us.

These results are based on tests carried out by our suppliers and our own experience. We cannot give any guarantee for the optimal adhesion of the materials. We assume that the customer checks the suitability of the materials, meets his needs and decides for the right material that meets his requirements. The labels should be stored in a dryplace, at an ambient temperature of between 20° - 24 °C and protected from the effects of the weather, such as sun, rain or snow. The adhesive reacts very quickly, especially to the effects of weathering.

QUESTIONS? WE'RE HERE TO HELP!

+49 6502 98494 0

info@etikett.de

The colour of the material shown may vary. Therefore, we recommend that you order our free online sample book at *etikett.de/musterbuch* to get a better understanding of the effects and different textures.

Order free of charge:

SAMPLE BOOK